


***Hypertherm***<sup>®</sup>  
***HySpeed***<sup>®</sup> HT2000<sup>®</sup>

***LongLife***<sup>®</sup>  
***200-amp oxygen  
plasma cutting system***

ISO 9001

### Delivers fastest cut speeds and lowest operating costs available for 200-amp oxygen plasma

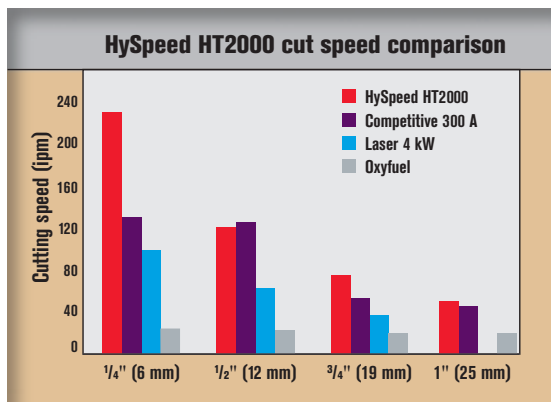


The HySpeed HT2000 and HySpeed HT2000LHF oxygen plasma cutting systems now utilize Hypertherm's patented Coaxial-assist™ jet technology to boost cutting speeds as much as 50% over conventional designs. The Coaxial-assist technology is available at 200 amps using LongLife oxygen processes to cut mild steel from 1/4-inch (6 mm) to 2-inch (50 mm) thick. Dross is minimized and super weldability of the cut edge is delivered.

In addition to the Coaxial-assist process, the dual gas HySpeed HT2000 and HySpeed HT2000LHF operate with conventional consumables for optimal results on the broadest spectrum of material types and thicknesses.

Unparalleled productivity and low operating costs are assured. The system cuts most mild steel faster than competitive 300-amp oxygen cutting systems, laser or oxyfuel. LongLife technology enhances the performance of the HySpeed HT2000 by extending consumable parts life to reduce operating costs.

The HySpeed HT2000 plasma system mounts easily on punch presses and X-Y tables of all sizes. Hypertherm's technologies are incorporated throughout to make it the most efficient metal-cutting system you can buy. If there's a way to lower your cost of cutting, Hypertherm builds it into the HySpeed HT2000.

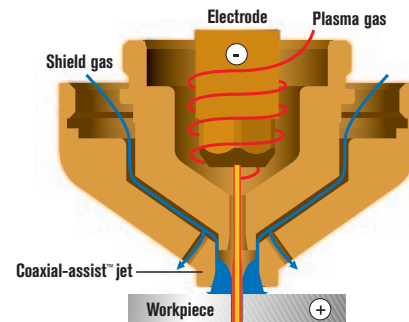

#### Improved piercing and extended nozzle life


No competitive system in its class has the HySpeed HT2000's piercing capability – critical in mechanized production cutting applications. With the Coaxial-assist 200-amp consumables the HySpeed HT2000 and HySpeed HT2000LHF offer production piercing of 1-inch (25 mm) mild steel and maximum piercing as thick as 1.5-inch (38 mm) mild steel.

Hypertherm's patented shield technology protects the nozzle against double-arcing during cutting and piercing. Delivering consistent cut angles, improved cutting performance and greatly increased nozzle life.

#### HySpeed HT2000LHF: more affordable in selected applications

If your torch can be positioned within 50 feet (15 m) of the power supply, the HySpeed HT2000LHF offers the same high performance as the HySpeed HT2000 – but at a lower cost.

#### Torch and HySpeed consumables

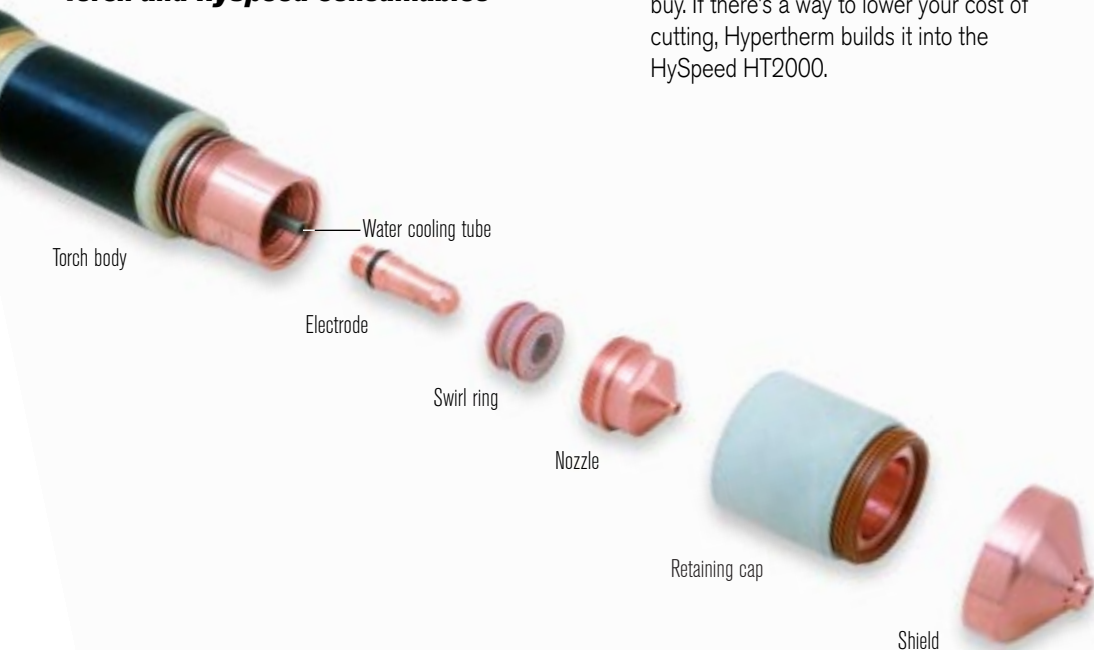

## Built for long consumable life and low operating costs

The LongLife process utilizes microprocessor control to ramp up the gases and current when initializing the cutting process and ramp them down when stopping.


LongLife's precise control of cutting parameters extends electrode life dramatically. Depending on the cut duration and the method of cutting, a single electrode may deliver over 1200 starts before needing replacement.\*

## Even longer parts life with SilverPlus™

Now HySpeed HT2000 and HySpeed HT2000LHF systems feature patented SilverPlus electrode technology. This dramatic advance involves fusing a silver front-end onto the copper electrode base, so that silver surrounds the hafnium emitter. In many applications, this feature lets SilverPlus effectively double electrode life compared with standard all-copper electrodes.

## System features

- Cuts as fast as competitive 300-amp plasma systems with only 200 amps of cutting power.
- Current output from 50 to 200 amps for materials that range in thickness from 18 gauge (1.2 mm) to 2 inch (50 mm).
- Production piercing of mild steel up to 1-inch (25 mm) thick, and maximum piercing up to 1.5-inch (38 mm).
- Bevel capability to 3/4 inch (20 mm) at 45°.
- 100% Duty cycle at an output of 30 kW.
- Built-in microprocessor for precise control of current output, gas flow and other factors critical to cut quality, consumable parts life, and minimizing operating costs.
- Liquid-cooled torch contributes to long consumable parts life and low operating costs.
- Remote High Frequency (RHF) in the HySpeed HT2000 delivers real flexibility allowing the power supply to be up to 200 feet (60 m) from the torch.
- Superior warranty coverage – as with all Hypertherm systems – backs the HySpeed HT2000's power supply for two years and its torch for one year.

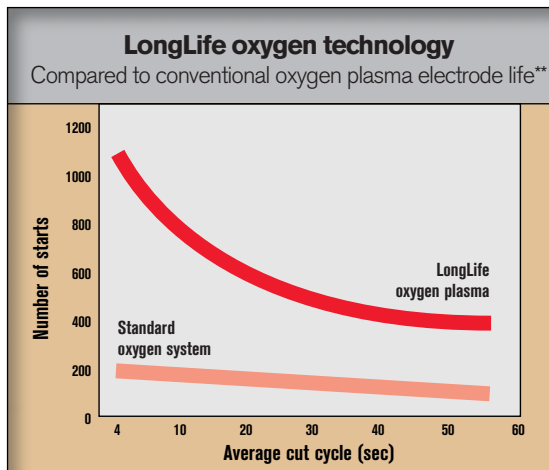

HySpeed HT2000 power supply

Gas console

Remote High-Frequency console (HySpeed HT2000 only)

Torch and leads

\* Results based on full compliance with LongLife operating procedures, including gas purity requirements and controlled start/stop processes.

\*\* Under laboratory conditions, using Hypertherm consumables.

## Operating data

Production cutting capacity (piercing) - mild steel	1" (25 mm)
Maximum pierce capacity - mild steel	1.5" (38 mm)
Maximum cutting capacity (edge start) - mild steel	2" (50 mm)

Material	Thickness		Current (amps)	Approximate cutting speed*	
	(inches)	(mm)		(ipm)	(mm/min)
Mild steel O <sub>2</sub> plasma O <sub>2</sub> shield	0.048 (18 gauge)	1.2	50	160	4,060
	0.074 (14 gauge)	1.8	50	120	3,050
	1/8	3.1	50	60	1,520
O <sub>2</sub> plasma Air shield	1/8	3.1	100	240	6,100
	1/4	6.2	100	120	3,050
	1/2	12.4	100	60	1,540
	3/4	20	100	30	760
O <sub>2</sub> plasma Air shield	1/4	6.2	200	230	5,800
	3/8	10	200	140	3,500
	1/2	12.4	200	120	3,000
	3/4	20	200	75	1,900
	1	25	200	50	1,300
	1 1/4	32	200	30	760
	1 1/2	38	200	20	500
	2	50	200	10	250
Stainless Air plasma Air shield	1/8	3.1	100	140	3,560
	1/4	6.2	100	80	2,030
	1/2	12.4	100	35	890
Air plasma Air shield	1/4	6.2	200	195	5,000
	3/8	10	200	145	3,700
	1/2	12.4	200	105	2,700
	3/4	20	200	55	1,400
	1	25	200	30	760
	1 1/4	32	200	15	380
	1 1/2	38	200	10	250
Ar-H <sub>2</sub> plasma N <sub>2</sub> shield	1/4	6.2	200	62	1,600
	1/2	12.4	200	42	1,100
	3/4	20	200	32	810
	1	25	200	22	560
	1 1/2	38	200	11	280
Aluminum Air plasma Air shield	1/8	3.1	100	110	2,800
	1/4	6.2	100	70	1,780
	1/2	12.4	100	40	1,010
Air plasma Air shield	1/4	6.2	200	190	4,800
	1/2	12.4	200	110	2,800
	3/4	20	200	65	1,650
	1	25	200	35	900
	1 1/4	32	200	20	500
	1 1/2	38	200	12	300

Note: Take care in comparison: Competitors often show maximum cutting speeds, rather than speeds that deliver the best cuts, as shown above. Although much higher speeds may be achieved, they are not recommended.

## Specifications



Input voltages	200 V, 3 PH, 50 Hz; 208 V, 3 PH, 60 Hz; 220/380/415 V, 3 PH, 50 Hz; 240/480 V 3 PH, 60 Hz; 600 V, 3 PH 60 Hz
Input current @ 30 kW output	108 A, 200 V; 104 A, 208 V; 98/57/52 A, 220/380/415 V; 90/45 A, 240/480 V; 36 A, 600 V
Output voltage	150 VDC
Output current	40 - 200 A
Duty cycle	100%
Maximum OCV	280 VDC
Dimensions	41.25" (1040 mm) D; 28.25" (710 mm) W; 35.5" (900 mm) H
Weight with torch	780 lbs (351 kg)
Gas supply	
Plasma gas	O <sub>2</sub> , Air, N <sub>2</sub> , Ar-H <sub>2</sub>
Plasma pressure	120 psi (8.3 bar)
Plasma flow	80 scfh (40 l/min.)
Shield gas	
Shield pressure	O <sub>2</sub> , Air, N <sub>2</sub> , CO <sub>2</sub> 90 psi (6.2 bar)
Shield flow	280 scfh (130 l/min.)

## Process capability

	Mild Steel	Stainless Steel	Aluminum
Plasma gas/shield gas	O <sub>2</sub> /Air	Air/Air	Air/Air
Cut thickness range	.048" - 2.0" (1.2 - 50 mm)	.125" - 1.5" (3.2 - 38 mm)	.125" - 1.5" (3.2 - 38 mm)
Dross-free range	.048" - 1" (1.2 - 25 mm)	.125" - .75" (3.2 - 19 mm)	.125" - .75" (3.2 - 19 mm)
Maximum piercing thickness	1.5" (38 mm)	.875" (22.2 mm)	.875" (22.2 mm)
Range of production cutting	50A	.048" - .125" (1.2 - 3.2 mm)	N/A
	100A	.125" - .375" (3.2 - 9.5 mm)	.125" - .375" (3.2 - 9.5 mm)
	200A	.25" - 1" (6.4 - 25 mm)	.25" - .875" (6.4 - 22.2 mm)
Range of kerf angle	0° - 5°	0° - 5°	0° - 5°

Note: The capabilities shown in this table were obtained by using new consumables, published speeds and current, accurate torch height control, and torch perpendicular to the workpiece.

## Genuine Hypertherm Consumables

The only way to ensure maximum performance

Hypertherm, HySpeed, HT, LongLife, SilverPlus, Coaxial-assist and Command are trademarks of Hypertherm, Inc., and may be registered in the United States and/or other countries.

# Hypertherm®

The world leader in  
plasma cutting technology™

www.hypertherm.com

Hypertherm, Inc. USA 603-643-3441 Tel 603-643-5352 Fax mechanized.info@hypertherm.com

Hypertherm Automation, LLC USA 603-298-7970 Tel 603-298-7977 Fax info@hyperthermautomation.com

Hypertherm Plasmatechnik, GmbH Deutschland 49 6181 58 2100 Tel 49 6181 58 2134 Fax

HTDeutschland.info@hypertherm.com

Hypertherm (S) Pte Ltd. Singapore 65 6 841 2489 Tel 65 6 841 2490 Fax

HTSingapore.info@hypertherm.com

Hypertherm (Shanghai) Consulting Co., Ltd. P.R. China 86 21 5835 5362 /3 Tel 86 21 5835 5220 Fax

HTChina.info@hypertherm.com

Hypertherm Branch of Hypertherm UK, LLC England 00 800 3324 9737 Tel 00 800 4973 7329 Fax HTUK.info@hypertherm.com

France 00 800 3324 9737 Tel 00 800 4973 7329 Fax HTFrance.info@hypertherm.com

Hypertherm S.r.l. Italia 39 02 725 46 312 Tel 39 02 725 46 400 Fax HTItalia.info@hypertherm.com

Hypertherm Europe B.V. Nederland 31 165 596907 Tel 31 165 596901 Fax

HTEurope.info@hypertherm.com

Japan 81 0 559 75 7387 Tel 81 0 559 75 7376 Fax HTJapan.info@hypertherm.com

HYPERTHERM BRASIL LTDA. 55 11 6482 1087 Tel 55 11 6482 0591 Fax HTBrasil.info@hypertherm.com